

# Potomac

RUBBER COMPANY, INC.



Quality Industrial  
Rubber Goods Since  
1921

9011 Hampton Overlook • Capitol Heights, MD 20743

Tel: 301-336-7400 • Text Only: 301-541-8002

[info@potomacrubber.com](mailto:info@potomacrubber.com) • [www.potomacrubber.com](http://www.potomacrubber.com)

# TABLE OF CONTENTS

## V-Belts pg 3-6 Hoses pg 7-25

- \* General Service Air/Water - 8
- \* Multipurpose High Pressure Air - 8
- \* Wire-Braid Air - 9
- \* Sandblast - 9
- \* Non-Marking Hot Water Washdown - 10
- \* Single Jacket Cotton Mill - 10
- \* PVC Discharge - 11
- \* Double Jacket - 12
- \* Fuel Oil Delivery - 12
- \* Tank Truck - 13
- \* Gas Pump (Soft Wall) - 13
- \* Gas Pump (Hard Wall) - 14
- \* DEF Dispensing - 14
- \* Stainless Braid w/PTFE Tube - 15
- \* Marine Exhaust (Soft Wall) - 15
- \* Marine Exhaust (Hard Wall) - 16
- \* Silicone Heater - 16
- \* Steam - 17
- \* Potable Suction/Discharge - 17
- \* Commercial Vacuum - 18
- \* HD PVC Suction/Discharge - 18
- \* Rubber Suction - 19
- \* PVC Suction (Green and Clear) - 19
- \* Tiger Tail - 20
- \* EPDM Tiger Flex Suction - 20
- \* HD Material Handling - 21
- \* Contractor Water - 22
- \* HD General Purpose Water - 22
- \* PVC Potable Water (NSF) - 23
- \* LPG (Propane) - 23
- \* Tree-Tying - 24
- \* D.O.T. - 24
- \* Pressure Washer - 25

## Tubing pg 26-29

- \* Pure Gum - 27
- \* Signal Bell - 27
- \* Clear PVC - 28
- \* Polywire - 28
- \* Polybraid - 29
- \* Polyethylene - 29

## Fittings & Couplings pg 30-48

- \* "Boss" Ground Joint Couplings - 31
- \* "Air King" Universal Chicago Fittings & Acc - 32
- \* Cam & Groove "Kamlok"s & Acc- 33 & 34
- \* King Combo Nipples - 35
- \* Menders - 35
- \* Short Shanks - 35
- \* Bauer - 36
- \* Brass Barbed Inserts - 36
- \* Sand Blast Couplings - 37
- \* Strainers - 37
- \* Valves - 38
- \* Hydrant Adapters, Wrenches & Acc - 39

- \*Pipe Fittings - 39
- \*"Whip Check" Safety Cables - 40
- \*Victaulic Groove - 40
- \*Garden Hose Accessories - 41 & 42
- \*Quick Connects - 43
- \*Nozzles - 44 & 45
- \*Pressure Washer Accessories - 45

## Hose Assembly Capabilities pg 46-48

## Hose Reels & Parts pg 49

## Hydraulic Hose, Fittings & Adapters pg 50-53

- \*2-Wire Hose - 51
- \*4-Wire Hose - 52
- \*Hydraulic Fittings, Adapters & Threads - 53

## Matting, Mats & Stairtreads pg 54 - 56

- \*Vinyl Roll Matting - 55
- \*Heavy Corrugated Rubber Roll Matting - 55
- \*ASTM Switchboard - 56
- \*Mats & Stairtreads - 56

## Packing, Gaskets & Sheet Rubber pg 57-79

- \*Neoprene - 58
- \*Buna-N, Nitrile (NBR) - 59
- \*White, FDA Nitrile - 60
- \*EPDM - 61
- \*Peroxide Cured EPDM - 62
- \*SBR, Red Sheet, Rainbow Rubber - 63
- \*Silicone - 64
- \*Viton - 65
- \*Natural "Pure Gum" - 66
- \*Neoprene Diaphragm Sheet - 67
- \*Nitrile Diaphragm Sheet - 68
- \*SBR Cloth-Insert Sheet - 69
- \*Urethane Sheet - 70
- \*Closed-Cell Sponge - 71
- \*Open-Cell Sponge - 72
- \*Compressed Fiber w/NBR Binder - 73
- \*Plant Fibre - 74
- \*Flexible Graphite Sheet - 74
- \*Iso-Cube Waffle Pads - 75
- \*Rubber & Cork Vibration Pads - 75
- \*EVA Vibration Pads - 76
- \*Solid Rubber Vibration Pads - 76
- \*Molded & Extruded Parts - 77
- \*Plow Blades & Skirtboard - 78
- \*Flange & Ring Gaskets - 79

## Adhesives & O-Rings pg 80-82

- \*3M Adhesives - 81
- \*O-Rings, Cord & Kits - 82

## Expansion Joints & Flex Connectors pg 83

## Submersible Pumps & Floats pg 84

# Potomac RUBBER COMPANY

INCORPORATED

**ADHESIVES** – 3M, Gorilla Glue,  
SuperTAK

**BEARING PADS** – rubber, PTFE,  
AASHTO grade

**BELTS** – V belts, cog, wedge,  
timing, variable speed, banded,  
link-type, pulleys, sheaves

**BUMPERS** – Laminated Dock,  
"D" dock & "T" dock, wall and  
cart, corner

**CHANNEL RUBBER** – "U"  
Channel

**CLAMPS** – worm gear, T-Bolt,  
Center Punch, Roll-Over,  
Stainless & Galvanized Steel,  
Spiral, Double or Single Bolt

**CONVEYOR BELTS** – light &  
heavy duty, food grade, incline,  
flat

**COUPLINGS** – air, steam, water,  
hydraulic, fuel, complete DIXON  
Valve line

**EXPANSION JOINTS** – rubber  
single or double sphere, stainless  
braid, flanged, unions, jump sizes

**FITTINGS** – Kamlok, Chicago,  
Valves, brass inserts, scovills,  
boss/ground joint style, sandblast,  
short shanks, Victaulic/groove,  
nipples, internal expansion, Bauer,  
elbows, reducers, hydrant  
adapters, whipchecks, menders,  
GHT, NST/NH, NPSH, Wye, Ball  
Valves, Strainers, swivels, water  
keys

**GASKETS** – Die cut, CNC Knife  
Jet, custom, wide variety of  
materials available for cutting

**GLOVES** – disposable, chemical,  
leather, rubber, reusable

## GROMMETS

**GASKET MATERIALS** –  
compressed fiber/Garlock,  
neoprene, Buna-N Nitrile,  
Cloth-Insert, Diaphragm sheet,  
Mil Spec, SBR/Red Rubber,  
Silicone, Pure Gum/Natural  
Rubber, Plant Fibre, Viton, Food  
Grade, Teflon, EPDM, Closed Cell  
& Open Cell Sponge, Skirtboard

**HOSE** – air, ducting, chemical,  
water, garden, single jacket, double  
jacket, pvc discharge, potable, fuel  
oil delivery, gas pump, marine  
exhaust, pressure washer, pvc  
suction, rubber suction, material  
handling, steam, sandblast,  
non-marking, tank truck fuel, wire  
braid air/Bull hose, Gorilla hose,  
stainless braid w/Teflon tube,  
radiator, silicone heater, vacuum,  
flex hoses, steam, DEF, tree-tying

**HOSE REELS** – Hannay

**MATTING** – switchboard, carpet  
cover, anti-fatigue, walk-off,  
rubber runner, pvc runner, stair  
treads, customized, anti-slip,  
corner guards

## MOLDED OR EXTRUDED PARTS

**NOZZLES** – lever garden, fog  
(brass or plastic), brass twist,  
lawn water saver, fire nozzles,  
Gasoline, Diesel

**O-RINGS** – splicing kits,  
assortment kits, TurboFuse  
adhesive, Cord, various sizes  
stocked

**PACKING** – PTFE, Graphite,  
Palmetto, TEAD-IT

**PRESSURE WASHER** – hoses,  
fittings, custom lengths, 4000#,  
6000#, nozzles, handles, lances,  
tips, accessories

**PUMPS** – submersible, Godwin,  
Tsurumi, floats

**QUICK CONNECTS** – Cam and  
Groove/Kamloks, Pneumatic  
sockets & plugs, Hydraulic,  
Pressure washer

**SAFETY PRODUCTS** – goggles,  
vests, clothing, boots, gloves,  
whipchecks, OSHA valves, etc

**SEALANTS** – Gasoil, Teflon  
Tape

**SPONGE** – closed-cell, open-cell,  
neoprene-epdm-sbr blend, with or  
without pressure-sensitive  
adhesive backing, gaskets, sheets,  
weather stripping, dortite

## STAIR TREADS

**TUBING** – pure gum,  
polyethylene, signal call, clear  
pvc, polybraid, silicone, wire  
reinforced pvc

**V-BELTS** – 3L, 4L, A, AX, B, BX,  
3VX, 5VX, banded belts,  
Carlisle/Timken, Jason Megadyne,  
D&D Drive, Bestorq

**VIBRATION PADS** – 7/8" thick  
cork & rubber pads, 3/8" thick all  
rubber, waffle pads, EVA & rubber  
pads

**WASHERS** – custom sizes,  
various thicknesses & materials  
available

**WEATHERSTRIP** – Dortite,  
custom widths, various  
thicknesses, with or without PSA  
backing

## STATEMENT OF POLICY

---

### PRICES

Due to fluctuating market conditions, prices have been omitted from this catalogue. Current pricing information will gladly be furnished on any item per your request.

### TERMS

Approved credit accounts will receive Net 30 terms. Credit Cards are also accepted. All shipments are FOB Origin unless otherwise agreed upon.

### TAXES

Federal and state taxes will be applied to all invoices unless a tax exemption certificate is on file or supplied at the time of order.

### WARRANTY

All first quality merchandise sold by Potomac Rubber Company Inc., is warranted to be free from defect in material and workmanship. Our liability with respect there to is limited, however, to your net purchase price of any such merchandise proved defective or, at our option, to the repair or replacement of such merchandise upon its return to us, transportation charges prepaid, and in either case, after a pro-rata charge for any service rendered. No claim will be allowed by us on any item of merchandise purchased for further processing unless we are notified thereof within thirty (30) days after your receipt thereof and are permitted to examine it before use or processing. Except as expressly stated above we make no warranty, express or implied, other than as to title, and we specifically disclaim the implied warranty of fitness for a particular purpose, and we shall not be subject to liability for any damages resulting from the handling, use or further processing of said merchandise whether alone or in combination with other materials. In no event shall the seller be liable for any incidental, consequential or special damages.

Special cut hoses or rubber products are not eligible for return or refund once they have been produced, except in the instance of poor material or workmanship as stated above.

Hose repair services are available only after the hose has been evaluated by our hose assembly specialist. Potomac Rubber Company, Inc. is not subject to liability for hose failure after repair and we do not warranty hose repairs.

Possession of this catalogue does not constitute an offer, and we reserve the right to accept or reject any or all orders.



# Potomac RUBBER COMPANY

INCORPORATED



## HOSE PRODUCTS



## TYPE H-24

### **GENERAL SERVICE AIR/WATER**

**Recommended Use:** For general service applications under moderate operating conditions. Also for air, water, and low pressure water based agricultural spray applications

**Tube:** EPDM **Reinforcement:** Spiral Polyester cord **Cover:** Red EPDM



**\*-C version has an SBR Tube & Cover\***

**Pressure Rating:** Available in 200 or 300psi

**Temp:** Up to 176-212 deg F

**Lengths:** Cut to desired length

**Stock Sizes:** 1/4", 3/8", 1/2", 3/4", 1"ID

## TYPE H-26

### **MULTIPURPOSE HIGH-PRESSURE**

**Recommended Use:** For a wide range of applications in factories, construction, and agriculture requiring higher pressures and oil resistance. Designed for transfer of petroleum or other solvent solutions and washdown operations.

**Tube:** Nitrile, RMA Class A (High Oil Resistance)

**Reinforcement:** 4-Spiral Polyester Cord **Cover:** Yellow Nitrile Blend

**Pressure Rating:** 500 psi (all sizes) **Lengths:** Cut to desired length

**Stock Sizes:** 3/8", 1/2"ID

**Temp:** Up to 190-212 deg F (Dep. On Brand)

**Brand:** Goodyear Contitech "Gorilla" or Thermoid "Hercules"



## **TYPE H-28**

### ***WIRE-BRAID AIR***

**Recommended Use:** A premium wire hose for air service and water jetting use at mines, quarries and highway construction sites. A crushproof and extra heavy-duty hose designed to safely handle high

working pressures under the most severe on-the-job conditions.

**Tube:** Nitrile Blend **Cover:** Yellow SBR, pin-pricked **Reinforcement:** 2-Spiral

**Wires Temp:** Up to 200 deg F **Pressure Rating:** 600 psi (all sizes) **Stock Sizes:**

1/2", 3/4", 1", 1-1/4", 1-1/2", 2"

**Lengths:** Sold ONLY in 50 ft lengths



## **TYPE H-31**

### ***ABRASIVE MATERIAL BLAST***

**Recommended Use:** Designed to convey abrasives, sand and shot blast material

**Tube:** Black Static Conducting Natural Rubber **Cover:** Black SBR/NR Blend

**Reinforcement:** 4-ply High Tensile Textile Cords

**Temp:** Up to 176 deg F

**Pressure Rating:** 180 psi (all sizes)

**Stock Sizes:** 1/2", 3/4", 1" ID

**Lengths:** 25, 50 or 100ft





## TYPE H-32

### **NON-MARKING HOT WATER WASHDOWN**

**Recommended Use:** For hot water up to 200deg F, cleanup service in food processing plants, dairies, packing houses, bottling plants, and creameries.

**Tube:** Nitrile, RMA Class A (High-Oil Resistance)

**Cover:** White Chemivic synthetic rubber, RMA Class A (High-Oil Resistance)

**Reinforcement:** Spiral synthetic yarn

**Temp:** Up to 200deg F

**Pressure Rating:** 300 psi

**Stock Sizes:** 1/2", 3/4"ID

**Lengths:** Cut to desired length



## TYPE H-36

### **SINGLE JACKET COTTON MILL**

**Recommended Use:** Designed for open-end discharge, pump discharge and other light-duty service. NOT suitable for fire protection or fire hydrant use.

**Tube:** Seamless, extruded, ozone resistant, non-acid forming rubber

**Cover:** Woven Jacket 100% polyester synthetic yarn

**Pressure Rating:** 150 psi

**Stock Sizes:** 1-1/2",

2", 3", 4"ID

**Lengths:** 25, 50, 75 or 100ft





## TYPE H-37

### ***BLUE PVC DISCHARGE***

**Recommended Use:** Used for open-end discharge or pump discharge of water, sewage, mine acid water, etc. Age and weather resistant.

**Construction:** Blue Spiral PVC

**Temp:** Up to 140 deg F

**Pressure Rating:** 40 – 75 psi (Depends on Size)

**Lengths:** 25, 50, 75, 100, 300ft

**Stock Sizes:** 2", 3", 4", 6"



## TYPE H-37R

### ***RED PVC DISCHARGE***

**Recommended Use:** Used for discharge of water, sewage, mining, etc where higher pressures are required.

**Construction:** Red Spiral PVC

**Temp:** Up to 140 deg F

**Pressure Rating:** 115 – 150psi (Depends on Size) **Lengths:** 25, 50, 75, 100, 300ft **Stock Sizes:** 1-1/2", 2", 3", 4", 6"



## **TYPE H-39DJ**

### **HEAVY-DUTY DOUBLE JACKET DISCHARGE**

**Recommended Use:** Used for fire hydrant discharge pressures, street washdown, etc. NOT suitable for Fire Fighting.



**Tube:** Slow-aging, non-acid forming rubber

**Cover:** Double layer of polyester yarn that resists acids, alkalis, and many chemicals that tend to deteriorate ordinary hose.

**Pressure Rating:** 200 – 400 psi (Depends on size, brand and assembly)

**Lengths:** 25, 50, 75, 100ft

**Stock Sizes:** 1-1/2", 2", 2-1/2"

**Coupled Stock Assemblies:** 1-1/2" x 50ft MxF NPSH or NH/NST, 1-1/2" x 100ft MxF NH/NST, 2" x 50ft MxF NPSH, 2-1/2" x 50ft MxF NH/NST

## **TYPE H-46**

### ***FUEL OIL DELIVERY***

**Recommended Use:** High quality hose to handle diesel, oil, fuel oil, kerosene and other petroleum products for home delivery.

**Tube:** Black, NBR (ARPM Class A)

**Cover:** Red, NBR (ARPM Class A)

**Reinforcement:** 2-ply Braided Polyester Cords

**Pressure Rating:** 250 psi

**Stock Sizes & Lengths:** 1-1/4" x 175ft, 1-3/8" x 150ft, 1-3/8" x 175ft



**\*Coupled In-House with Brass Internally Expanded Scovill Fittings\***

## TYPE H-47

### ***HARD-WALL TANK TRUCK PETROLEUM SUCTION/DISCHARGE***

**Recommended Use:** For suction and discharge applications in truck and tank car transfer of petroleum-based media with up to 50% aromatic content. This hose may also be used for marine wet exhaust and bilge pump connections.

**Tube:** Black Conductive NBR

**Cover:** Black CR

**Reinforcement:** High tensile textile cords with flex steel helix wire

**Pressure Rating:** 150 psi

**Temp:** Up to 176 deg F

**Lengths:** Rolls come 100ft. Cut to desired Length.

**Stock Sizes:** 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"ID



## TYPE H-50

### ***SOFT-WALL GAS PUMP DISPENSING***

**Recommended Use:** For gasoline or diesel pump dispensing applications where flexibility and lightweight features are desired.

**Tube:** Nitrile Blend – Class A **Cover:** Oil Resistant Synthetic Rubber

**Reinforcement:** 2-ply braided synthetic yarn with static wire

**Temp:** Up to 180 deg **Pressure Rating:** 150 – 200 psi (Depending on Size)

**Lengths:** Cut to desired length

**Stock Sizes:** 3/4", 1" ID



## TYPE H-51

### **HARD-WALL GAS PUMP DISPENSING**

**Recommended Use:** For gasoline or diesel pump dispensing applications requiring the ability to withstand rough treatment at service stations.



**Tube:** Nitrile Blend – Class A

**Cover:** Oil Resistant Synthetic Rubber

**Reinforcement:** 1-ply wire braid

**Lengths:** Cut to desired length

**Pressure Rating:** 150 – 200 psi (Depending on size) **Stock Sizes:** ¾", 1" ID

## TYPE H-55

### **DEF DISPENSING**

**Recommended Use:** For transfer of Diesel Exhaust Fluid.



**Tube:** Low-extraction, peroxide cured EPDM

**Cover:** EPDM

**Reinforcement:** Polyester Braid

**Lengths:** Cut to desired length

**Temp:** Up to 140 deg F

**Pressure Rating:** 250 psi

**Stock Size:** ¾"ID



## TYPE H-65

### ***STAINLESS BRAID W/ SMOOTH PTFE TUBE***

**Recommended Use:** For hydraulic, air, water and steam lines. Well suited for air compressor discharge lines where vibration and high temperatures are present.



**Tube:** Smooth PTFE (Teflon)

**Cover:** Single Stainless Steel Braid (304)

**Lengths:** Cut to desired length

**Temp:** Up to 500 deg F

**Pressure Rating:** 150 – 1000 psi (Depending on Assembly)

**Stock Sizes:** 1/2", 3/4", 1" ID

## TYPE H-74

### ***SOFT-WALL MARINE EXHAUST***

**Recommended Use:** For wet marine, coolant and heavy-duty radiator service. Resists, hot water, antifreeze solutions, oily water and exhaust gases.



**Tube:** Synthetic Blend Rubber

**Cover:** Synthetic Blend Rubber

**Reinforcement:** High Tensile Textile Cords

**Temp:** Up to 212 deg F

**Pressure Rating:** 75 psi (all sizes)

**Lengths:** Cut to desired length but sold per Ft

**Stock Sizes:** 1-1/4", 1-3/8", 1-1/2", 1-5/8", 1-7/8", 2", 2-1/4", 2-3/8", 2-1/2", 3", 3-1/2", 4", 4-1/2", 5", 5-9/16"

## TYPE H-74W

### **HARD-WALL MARINE EXHAUST**

**Recommended Use:** For fuel, oil and hydraulic fluids suction and discharge. Suitable for exhaust gas from water cooled or marine diesel engines.

**Tube:** Black NBR      **Cover:** Black NBR/PVC Blend

**Reinforcement:** High tensile textile cords with flex steel helix wire

**Temp:** Up to 212 deg F      **Pressure Rating:** 30psi (all sizes)

**Lengths:** Cut to desired length but sold per Ft

**Stock Sizes:** ½", 5/8", ¾", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2", 2-1/8", 2-1/4", 2-3/8", 2-1/2", 2-3/4", 3", 3-1/8", 3-1/4", 3-1/2", 4", 4-1/2"



## TYPE H-81

### **SILICONE HEATER**

**Recommended Use:** For use in water and ethylene glycol-based engine coolant systems.

**Tube:** Silicone      **Cover:** Silicone

**Reinforcement:** 1-ply or 4-ply Textile cord

**Temp:** Up to 350 deg F      **Pressure Rating:** 44 – 63 psi (Size dependent)

**Lengths:** Cut to desired length but sold per Ft

**Stock Sizes:** 5/8", ¾", 1", 1-1/4" (1-ply), 2" (4-ply)



## TYPE H-82

### **EPDM STEAM 2-WIRE**

**Recommended Use:** For the transfer of steam up to 270psi and 410 deg F

**Tube:** Black Extruded EPDM

**Cover:** Black EPDM, Pin-Pricked

**Reinforcement:** 2 High tensile Steel Braids      **Temp:** Up to 410 deg F

**Pressure Rating:** 270 psi      **Lengths:** Cut to desired length

**Stock Sizes:** 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"



## TYPE H-83

### **POTABLE WATER SUCTION/DISCHARGE**

**Recommended Use:** For Liquid food suction and discharge. Suitable for alcoholic beverages up to 75 % alcohol content and 150 proof, milk tanker applications, animal fats and vegetable oils.

**Tube:** White NBR (FDA & 3A compliant) **Cover:** White NBR/PVC

**Reinforcement:** High tensile textile cords with steel helix wire

**Temp (for liquids):** Up to 230 deg F **Temp (for fat foods):** Up to 248 deg F

**Pressure Rating:** 150 psi (all sizes)      **Lengths:** 10, 20, 25, 50, 100ft

**Stock Sizes:** 1", 2", 3"



## **TYPE H-84**

### **COMMERCIAL VACUUM**

**Recommended Use:** For industrial and commercial vacuum applications. Crush resistant, excellent flexibility and abrasion resistance, with or without cuffs.



**Construction:** Polyethylene hose reinforced with a polyethylene helix

**Temp:** Up to 140 deg F

**Pressure Rating:** 15 psi

**Length:** 25 ft

**Stock Size:** 2"ID x 25 ft (with or without cuffs)

## **TYPE H-85**

### **HEAVY DUTY PVC FABRIC-REINFORCED SUCTION & DISCHARGE**

**Recommended Use:** For fishing suction, irrigation, pumps, dewatering, trash pumps and heavy-duty water suction and discharge applications.



**Tube:** 2-ply PVC

**Reinforcement:** polyester fabric

**Cover:** Rigid PVC Helix

**Temp:** Up to 150 deg F

**Pressure Rating:** 37 – 75 psi (Temp dependent)

**Length:** 10, 15, 20, 25, 50, 100ft

**Stock Size:** 4"ID



## **TYPE H-86**

### ***GENERAL PURPOSE WATER SUCTION & DISCHARGE***

**Recommended Use:** Water suction and delivery for irrigation, construction, fertilizers, and lasso acid solutions.

**Tube:** Black EPDM

**Cover:** Black EPDM

**Reinforcement:** Spiraled high tensile textile cords with flex steel helix wire

**Temp:** Up to 212 deg F

**Pressure Rating:** 150 psi (all sizes)

**Length:** 10, 15, 20, 25, 50, 100ft

**Stock Sizes:** 1-1/2", 2", 2-1/2", 3", 4", 6"ID



## **TYPE H-87**

### ***STANDARD DUTY PVC SUCTION – GREEN OR CLEAR***

**Recommended Use:** For water suction, liquid fertilizer, air seeder lines, drain lines, irrigation lines and pumps.

**Construction:** PVC tube with rigid PVC helix

**Temp:** Up to 150 deg F

**Pressure Rating:** 40 – 85 psi (depends on size)

**Length:** 10, 15, 20, 25, 50, 100ft

**Stock Sizes:** 1", 1-1/2", 2", 3", 4", 6"



## **TYPE H-88**

### ***TIGER TAIL/BUMBLEBEE SUCTION***

**Recommended Use:** Ideal for waste evacuation, septic pumping and sewer cleaning.

**Construction:** Polyethylene hose reinforced with polyethylene helix

**Temp:** Up to 140 deg F

**Pressure Rating:** 7 – 26 psi (depending on size)

**Lengths:** 25 or 50 ft

**Stock Sizes:** 1-1/2", 2"ID



## **TYPE H-89**

### ***EPDM TUBE TIGER FLEX SUCTION***

**Recommended Use:** For irrigation lines, liquid fertilizers, marine bilge discharge, trash pumps, septic and wastewater handling and water suction.

**Construction:** EPDM tube with Polyethylene helix

**Temp:** Up to 160 deg F

**Pressure Rating:** 30-65 psi (Depends On size)

**Lengths:** 10, 15, 20, 25, 50, 100 ft

**Stock Sizes:** 1-1/2", 2", 3", 4", 6"ID

**Stocked Color:** Green



## TYPE H-90

### ***HEAVY DUTY SBR WET OR DRY MATERIAL HANDLING SUCTION***

**Recommended Use:** For slurry handling, sewer truck boom hose, rock/gravel/sand vacuum, abrasive material suction

**Construction:** SBR Tube with Rigid PVC helix

**Pressure Rating:** 26-32 psi (Depends on size)

**Temp:** Up to 150 deg F

**Lengths:** 10, 15, 20, 25, 50, 100 ft

**Stock Sizes:** 2", 3" 4"ID



## TYPE H-91


### ***HEAVY DUTY POLYURETHANE LINED MATERIAL HANDLING***

**Recommended Use:** For industrial vacuum equipment, material chutes, heavy duty abrasive materials, rock/gravel/sand vacuum and shot blast recovery.

**Construction:** PVC Cover with polyurethane liner and rigid PVC helix

**Temp:** Up to 150 deg F **Pressure Rating:** 15 – 30 psi (depends on temp)

**Lengths:** 25, 50, 100 ft **Stock Size:** 6"ID

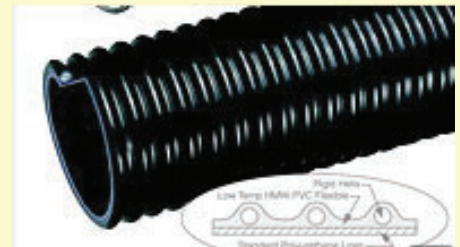

## **TYPE H-95**

### ***CONTRACTOR MUNICIPAL WATER HOSE***

**Features:** Hybrid Garden hoses are made with a flexible hybrid polymer that is lightweight and durable. It is abrasion resistant, flexible and has zero memory. These come coupled with brass garden hose threaded MxF couplings and a bend restrictor on the female side.



**Cover & Tube:** Premium hybrid polymer

**Reinforcement:** polyester interlayer

**Pressure Rating:** 150 psi

**Stock Size:** 3/4" x 50ft (can be cut into 25 ft lengths if needed)

**Stock Color:** Black

## **TYPE H-96/97**

### ***HEAVY DUTY GENERAL PURPOSE***

**Recommended Use:** For heavy duty water or air discharge service.

**Tube:** EPDM

**Reinforcement:** 4-ply polyester cord

**Cover:** Black EPDM

**Temp:** Up to 210 deg F

\* version has SBR Tube & Cover w/ Temps up to 176 deg F\*

**Pressure Rating:** 200-300 psi (Depends on size and brand)

**Lengths:** Cut to desired length

**Stock Sizes:** 1/2", 3/4", 1", 1-1/4", 1-1/2" (H96) 2" (H97)





## **TYPE H-98/99**

### ***PVC POTABLE WATER HOSE (NSF 51/61 CERTIFIED)***

**Features:** Non-marking cover (gray – H98; white – H99) reduces tendency for algae growth and UV degradation in warm, sunny applications. For transfer of potable water or deionized water.

**Tube:** Clear FDA/NSF PVC

**Reinforcement:** High tensile strength yarn

**Cover:** Gray or White Phthalate Free PVC

**Temp:** Up to 150 deg F

**Pressure Rating:** 85 – 150 psi (depending on temp)

**Lengths:** 25, 50, 100, 150, 200ft      **Stock Size:** ¾"ID



## **TYPE H-15**

### ***LIQUID PROPANE GAS HOSE***

**Features:** For the transfer of LP Gas. This hose has been pin-pricked to permit gas diffusion. It has a smooth black cover that resists snagging, abrasion and oil.



**Tube:** Nitrile, ARPM Class A

**Cover:** Type 75B Nitrile Blend

**Reinforcement:** 4-ply Spiral Yarn

**Temp:** Up to 180 deg F

**Pressure Rating:** 350 psi

**Stock Size:** ¼"ID (other sizes avail. with special order)

**Lengths:** Cut to desired length

## **5H08C300**

### ***TREE-TYING HOSE***

**Features:** Built to withstand the abuse of corrosives and abrasion. The kink-resistant vinyl tube and cover resist cracking and weather.

**Tube & Cover:** Vinyl

**Stock Size:** ½"ID x 300ft (only sold in 300ft rolls)



## **1108DOT**

### ***D.O.T. SAE 100R5***

**Performance:** Meets or exceeds – SAE 100R5, DOT FM VSS 106 Type All, SAE J1402 Type All

**Features:** General purpose, medium pressure hose for air brakes, power steering, turbo oil lines, tilt cap cylinders, transmission coolant and filtration lines. This hose is also compatible with petroleum-based hydraulic fluids, air, water, gasoline and diesel fuel, lubricating oils and coolants.

**Stocked Size:** ½" ID

**Lengths:** Cut to desired length

**Pressure Rating:** 1750 psi



## **PRESSURE WASHER HOSES**

### **STOCKED ASSEMBLIES**

**11PW1G** – 3/8" X 50ft Gray, 4000 psi, Male x Male Swivel

**11PW2** – 3/8" x 50ft Grey, 6000 psi, Male x Male Swivel

**11PW2C** – 3/8"x 100ft Grey, 6000 psi, Male x Male Swivel

### **CUSTOM ASSEMBLIES**

**1104B1** – 1/4" ID Black Pressure Washer Hose, 5800 psi, up to 212 deg F

**1106B1** – 3/8" ID Blue Pressure Washer Hose, 6000 psi, up to 275 deg F

*\*These hoses can be cut and coupled at any length per your requirements\**

